



The DS-28 is a rugged chain and bar dangle saw. Designed for use on excavators, track feller bunchers, and loader type carriers. The durable and cost effective DS-28 runs on auxiliary or standard bucket hydraulics. It is great for general logging, pulp production, thinning, right of way clearing, storm clean up and more!


The head is equipped with a 3/4 pitch 11H saw chain running on a 37" bar. The model DS-28 is capable of cutting 28" in a single pass or cut a 35" tree with multiple passes. The grapple style arm design allows the operator to handle standing or fallen timber to fell, pile, cross-cut, trim, top and shovel.





DS-28 SPECIFICATIONS

Frame Construction	T-1 Alloy
Single Cut Capacity	28"
Maximum Opening	40"
Saw Bar	37" Roller Tip
Saw Chain	3/4 Pitch - 57 Links
Sprocket	9 Tooth
Saw Drive	Direct
Chain Oil Reservoir Capacity	10 Gallon
Height (without Rotator)	44-1/2"
Weight (with Rotator)	2,200 lbs.
Pressure & Flow Requirements from Carrier	35 - 55 @4000 psi

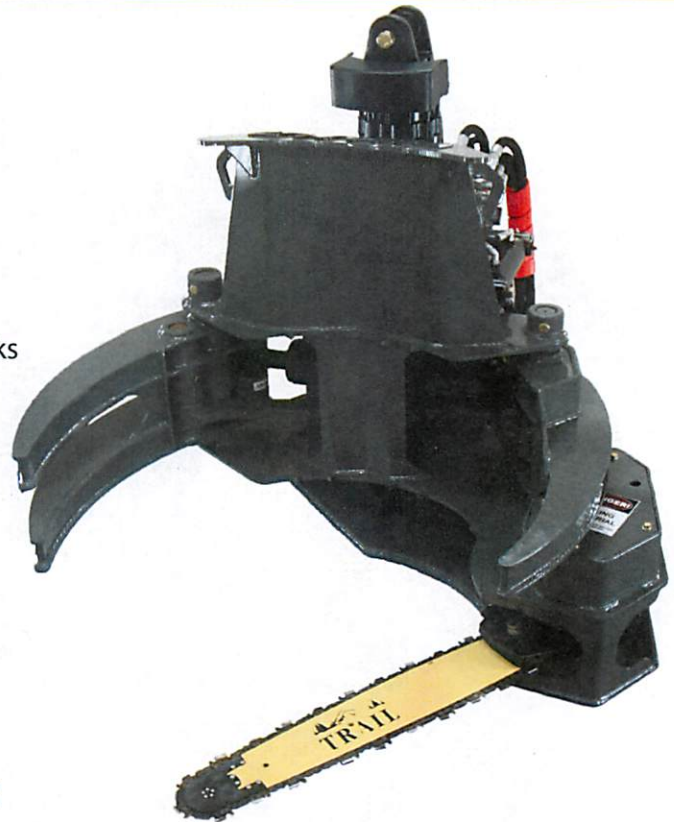

Call 989-427-2829 www.ryansequip.com info@ryansequip.com